

R-35 Wireless Wall Control Instructions

Built with RF technology, the R35 Wireless Wall Control Unit is designed for 1 channel (R35-1) or 2 channels (R35-2).



R35-1 front panel, showing 3 soft touch buttons for Open, Stop & Close functions from top to bottom.



With the attached metal plate mounted, the R35 unit could be affixed to it by magnetism to any surface, like a wall or a furniture, etc.

2pcs of AAA Batteries are needed.



Programming the Wall Control with Motor


- 1) Unplug power to the Motor.
- 2) Hand move the Master Carrier (or the curtain) back and forth the whole track a few times to make sure it travels the whole track smoothly.
- 3) Hand move the Master Carrier (or the curtain) half way on the track. Do not fully close or fully open.
- 4) Power on the Motor. Wait 5 seconds.



OR



- i) At the bottom of the Motor, use a pin to **press and hold** the “pin hole” for 5 seconds till the light LED light next to the pin hole turns solid.
- ii) Press the top “open” button a few times till the Master Carrier (or the curtain) on the track starts moving. Let the Master Carrier moves to the end and stops by itself.

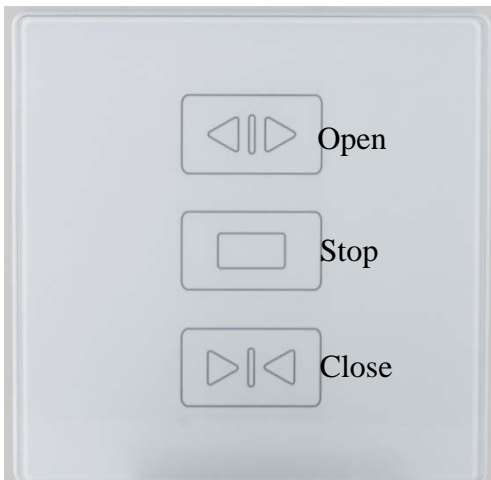

- iii) Press the bottom “close” button a few times till the Master Carrier on the track starts moving. Let the Master Carrier moves to the end and stops by itself.
- iv) Press the top “open” button a few times till the Master Carrier on the track starts moving. Let the Master Carrier moves to the end and stops by itself.

The programming is done. You may operate the curtain with the Wall Control to open, close or stop it.