

R-35 Wireless Wall Control Instructions

Built with RF technology, the R35 Wireless Wall Control Unit is designed for 1 channel (R35-1) or 2 channels (R35-2), controlling one or more curtain tracks.



R35-1 front panel, showing 3 soft touch buttons for Open, Stop & Close functions from top to bottom.



R35-2 is like two R35-1 units combined. Its front panel shows 2 independent control sets from left to right, for 2 different channels.

Use either control set to operate one or more designated tracks.



With the attached metal plate mounted, the R35 unit could be affixed to it by magnetism to any surface, like a wall or a furniture, etc.

Pairing with the motor



First install 2 AAA batteries into the compartments in the back.

Programming the Wall Control




Before programming the R35 Wireless Wall Control, program the Motor with the Handheld Remote Control first. Please read the instructions of the following link: [Click here for Instructions Page](#)

After the Motor works in harmony with the Handheld Remote Control, do the follow:



i) At the bottom of the Motor, use a pin to **press and hold** the “pin hole” for seconds till the light green LED light next to the pin hole turns solid.

ii) Press the top “open” button of R35 for 2 times (For R35-2 press either left or right “open” button for channel 1 or channel 2). All buttons will be illuminated simultaneously.

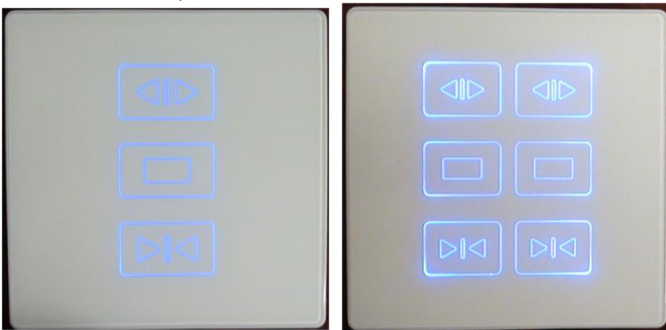

The programming is done.

IMPORTANT NOTE:

It is important to read the instructions before/during the installation.

Should you have any questions, please don't hesitate to contact us:

- Email: Support@PowerCurtain.com