

Assembling Instructions for CL-920 Curtain Track (Ripple Fold Type)

Please also read the full detailed instructions with videos which have been sent to your email with the tracking# for this shipment.

If you did not receive it, please request it at: Support@PowerCurtain.com




Due to the length limit set by the carrier, the track comes to you in two sections as the left picture shows.



Important Note:

Make sure the Green Belt is always inside both inner Channels of the Track. Otherwise push it back to the Channel with a screw driver.

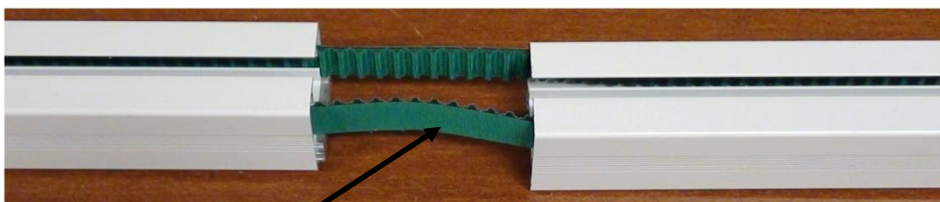

Unfold & lay the Track to be a straight line.

Make sure the Belt is not jammed and inside the inner channel.




The attached Connector with 4 screws could be seen underneath the Track.



Align the two Tracks together & slide the Track Connector till its center matches the joint. Then secure them together with the 4 screws. Make sure the joint is seamless.




The whole Track is now assembled. At this time the 2 separate Buckles will merge, as following picture shows.

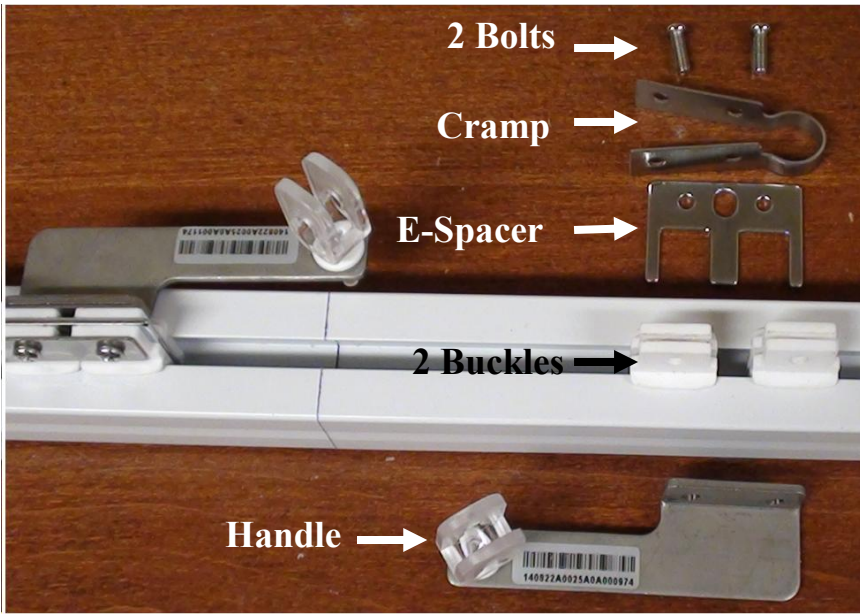

There're two Master Carriers running alongside the Track. One Carrier comes ready (left one in picture) & another comes in loose parts (components in picture).

Push the E-Spacer into the center slot of the 2 Buckles.

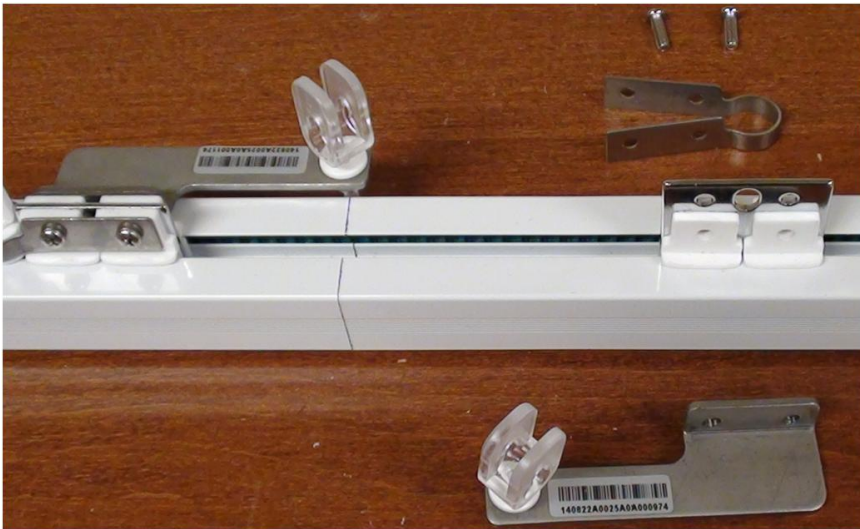

Enclose the very first Runner with the Cramp.



Finally secure the Handle to the Carrier with 2 Bolts

IMPORTANT NOTE

Hand move the Carrier alongside the Track back & forth a few times. Make sure it travels smoothly.

CAUTION

Never lift the Track at one end especially if the Track has a joint.

Whenever handling the Track, hands on both sides of the joint & balance the weight, in order not to creating a splice. At least Two people are needed to mount the Track.

For further inquiry please contact: Support@PowerCurtain.com